

# Event-triggered adaptive tracking control for stochastic nonlinear systems under predetermined finite-time performance

Dong-Mei Wang<sup>1</sup> | Shan-Liang Zhu<sup>1,2,3</sup> | Li-Ting Lu<sup>1</sup> | Yu-Qun Han<sup>1,2,3</sup> | Wenwu Wang<sup>1,4</sup> | Qing-Hua Zhou<sup>1</sup>

<sup>1</sup>School of Mathematics and Physics, Qingdao University of Science and Technology, Qingdao, China

<sup>2</sup>Research Institute for Mathematics and Interdisciplinary Sciences, Qingdao University of Science and Technology, Qingdao, China

<sup>3</sup>Qingdao Innovation Center of Artificial Intelligence Ocean Technology, Qingdao, China

<sup>4</sup>School of Computer Science and Electronic Engineering, University of Surrey, Guildford, UK

## Correspondence

Qing-Hua Zhou, School of Mathematics and Physics, Qingdao University of Science and Technology, Qingdao 266061, China.

Email: [QinghuaZhouQKD1909@163.com](mailto:QinghuaZhouQKD1909@163.com)

## Funding information

Shandong Provincial Natural Science Foundation, China, Grant/Award Number: ZR2020QF055

## Summary

In this paper, an event-triggered adaptive tracking control strategy is proposed for strict-feedback stochastic nonlinear systems with predetermined finite-time performance. Firstly, a finite-time performance function (FTPF) is introduced to describe the predetermined tracking performance. With the help of the error transformation technique, the original constrained tracking error is transformed into an equivalent unconstrained variable. Then, the unknown nonlinear functions are approximated by using the multi-dimensional Taylor networks (MTNs) in the backstepping design process. Meanwhile, an event-triggered mechanism with a relative threshold is introduced to reduce the communication burden between actuators and controllers. Furthermore, the proposed control strategy can ensure that all signals of the closed-loop system are bounded in probability and the tracking error is within a predefined range in a finite time. In the end, the effectiveness of the proposed control strategy is verified by two simulation examples.

## KEYWORDS

adaptive backstepping method, event-triggered control, multi-dimensional Taylor networks, predetermined finite-time performance, stochastic nonlinear systems

## 1 | INTRODUCTION

It is well known that many practical systems are often unstable due to the presence of stochastic perturbations. Therefore, the control design of stochastic nonlinear systems has become a hot research topic, and many control methods have been proposed, such as adaptive control,<sup>1–3</sup> sliding mode control,<sup>4</sup> and robust control.<sup>5</sup> Specifically, adaptive control has become an effective method to solve the control problems of stochastic nonlinear systems. Meanwhile, by combining the approximation-based intelligent control method with the traditional adaptive backstepping method, many meaningful research results have been achieved, such as neural network (NN) control,<sup>6–9</sup> fuzzy control,<sup>10,11</sup> and multi-dimensional Taylor network (MTN) control.<sup>12,13</sup> Specially, since MTN has the advantages of simple structure, small computational effort and fast function approximation,<sup>14</sup> MTN-based control method has gained more and more attention and been successfully applied to different types of stochastic nonlinear systems, such as stochastic nonlinear systems with input constraints,<sup>15–17</sup> stochastic nonlinear systems with multiple faults,<sup>13</sup> and large-scale stochastic nonlinear systems.<sup>18</sup> However, most of the above results focused on the control performance of the system while neglected the limitations of

control resources. Recently, a growing attention has been paid on event-triggered control (ETC), which has important theoretical significance and practical application value.

In recent years, event-triggered control has been rapidly developed because of its advantages such as low economic cost, high flexibility, and good operability. In view of the limited network resources, it is crucial to reduce the utilization of communication resources while ensuring the control performance. For this reason, the authors in Reference 19 first proposed the event-triggered mechanism for first-order stochastic systems, which can reduce redundant transmissions by discrete signal transmission. Since then, ETC-based approach not only has achieved many valuable results in nonlinear systems,<sup>20–22</sup> but also has been successfully extended to stochastic nonlinear systems<sup>23–27</sup> and stochastic nonlinear multi-agent systems.<sup>28</sup> However, although ETC has achieved fruitful results, most of the above results focused only on achieving tracking effects without considering the predetermined finite-time performance of the controlled system.

In practical systems, the tracking error usually needs to meet performance specifications, such as fast convergence and small steady-state error, to ensure the control performance of the systems. Many scholars have exerted great effort in addressing this issue. To improve the convergence speed and robustness of the closed-loop system, the authors in References 29,30 proposed a novel practically predefined-time control scheme for stochastic nonlinear systems, which can achieve the tracking error converges to a small neighborhood of the origin in the predefined-time sense. To enhance the tracking performance of the system, prescribed performance control method, which means the tracking error must satisfy prescribed boundary conditions, has been widely applied to general nonlinear systems<sup>31,32</sup> and stochastic nonlinear systems.<sup>33–36</sup> Regrettably, the above prescribed performance control results did not consider the predetermined finite-time performance problem. As a matter of fact, the control objectives of many demanding practical systems, such as robotic systems<sup>37,38</sup> and flight systems,<sup>39,40</sup> are usually desired to be achieved in a finite time. In this context, the authors in Reference 41 proposed the event-triggered control protocol to achieve finite-time consensus for the second-order leader-following nonlinear multi-agent system. Moreover, the predetermined finite-time performance control has received extensive attention and led to many valuable results.<sup>42–45</sup> However, the problem of event-triggered adaptive tracking control for stochastic nonlinear systems with predetermined finite-time performance has received little attention, which motivates us to carry out this work.

Based on the above analysis, the control problem of achieving the predetermined finite-time tracking performance for strict-feedback stochastic nonlinear systems is considered in this paper. An event-triggered adaptive tracking control strategy with a relative threshold is proposed by using the adaptive backstepping method and MTN, which can guarantee that all signals of the closed-loop system are bounded in probability. Compared with the existing results, the novel contributions of this paper can be summarized as follows:

1. A unified adaptive control framework is proposed to design the event-triggered adaptive tracking controller for strict-feedback stochastic nonlinear systems with predetermined finite-time performance by integrating MTN-based approach, adaptive backstepping method and stochastic stability theory. The proposed control strategy ensures that all the closed-loop signals are bounded in probability and the tracking error converges to a predefined region in a finite time. Although many event-triggered control strategies have been developed in References 24,27,43, the above results cannot be directly used to solve predetermined finite-time performance control problems for stochastic nonlinear systems.
2. Although many meaningful MTN-based results have been proposed for stochastic nonlinear systems,<sup>12,13,15</sup> the issues of predetermined finite-time performance control and ETC were not considered simultaneously. Even though the predetermined finite-time performance control problem was studied in References 42,44,46, their control objects were nonlinear systems, which ignored the presence of stochastic disturbances. In addition, the authors in References 33,34 addressed the predetermined performance control problem for stochastic nonlinear systems, while they did not consider finite-time control or ETC. Therefore, the problem and the system studied in this paper are more generalized.
3. In order to overcome the difficulties in controller design brought by the constrained tracking error, a coordinate transformation function is introduced, which can transform the constrained tracking error into an equivalent unconstrained variable. Besides, an event-triggered mechanism with a relative threshold is introduced to reduce the communication burden between actuators and controllers. Moreover, the control strategy proposed has the advantages of simple structure, small computation and easy implementation with the aid of MTN.

## 2 | PRELIMINARY PREPARATION OF PROBLEMS

### 2.1 | Problem formulation

In this paper, consider a class of strict-feedback stochastic nonlinear systems as follows

$$\begin{cases} dx_i = (x_{i+1} + f_i(\bar{x}_i))dt + g_i^T(\bar{x}_i)d\omega, & i = 1, \dots, n-1 \\ dx_n = (u + f_n(\bar{x}_n))dt + g_n^T(\bar{x}_n)d\omega \\ y = x_1 \end{cases} \quad (1)$$

where  $x_1, x_2, \dots, x_n$  denote the system states and  $\bar{x}_i = [x_1, \dots, x_i]^T \in R^i$ , for  $i = 1, 2, \dots, n$ .  $u$  and  $y$  represent the control input and measurement output of the system, respectively.  $\omega$  stands for an independent  $r$ -dimensional Wiener process.  $f_i(\bar{x}_i) : R^i \rightarrow R$  and  $g_i(\bar{x}_i) : R^i \rightarrow R^r$ ,  $i = 1, 2, \dots, n$  represent unknown smooth nonlinear functions satisfying  $f_i(\mathbf{0}) = 0$  and  $g_i(\mathbf{0}) = \mathbf{0}$ .

For system (1), the work of this paper is to propose an event-triggered adaptive tracking control strategy, which can achieve the following objectives

1. all the closed-loop signals are bounded on  $[0, +\infty)$  in probability.
2. the tracking error  $e_1 = y - y_d$  converges to a predefined region in a finite time.

The following Assumption and Lemmas are required for controller design.

**Assumption 1** (47). The reference trajectory  $y_d$  and its time derivatives up to the  $n$ -th order are continuous and bounded.

**Lemma 1** (1, Young's inequality). For any given  $(x, y) \in R^2$ , the following inequality holds

$$xy \leq \frac{\beta^p}{p} |x|^p + \frac{1}{q\beta^q} |y|^q, \quad (2)$$

where  $\beta > 0$ ,  $p > 1$ ,  $q > 1$ , and  $(p-1)(q-1) = 1$ .

**Lemma 2** (43). For  $\forall \xi > 0$  and  $\forall \tau \in R$ , the following inequality holds

$$0 \leq |\tau| - \tau \tanh\left(\frac{\tau}{\xi}\right) \leq 0.2785\xi. \quad (3)$$

### 2.2 | Finite-time performance function

To ensure the tracking error converges to a predefined region in a finite time, the definition of FTPF is introduced as follows



**Definition 1** (43). The continuous function  $\psi(t)$  is said to be FTPF, if it satisfies the following conditions:

- 1)  $\psi(t) > 0$  and  $\dot{\psi}(t) < 0$ , which means  $\psi(t)$  is a strictly monotonically decreasing positive function;
- 2) there exists a setting time  $T_c$ , such that  $\lim_{t \rightarrow T_c} \psi(t) = \psi_{T_c}$ , and for  $\forall t \geq T_c$ ,  $\psi = \psi_{T_c}$ , where  $\psi_{T_c} > 0$  is a arbitrarily small positive constant.

In this paper, a FTPF is chosen as

$$\psi(t) = \begin{cases} -\tanh\left(\psi_1 + \frac{t}{T_c - t}\right) + \psi_2 + 1, & 0 \leq t < T_c \\ \psi_2, & t \geq T_c, \end{cases} \quad (4)$$

where  $\psi_1, \psi_2, T_c$  are positive design constants, and  $\tanh(\cdot)$  represents the hyperbolic tangent function.



*Remark 1.* It should be emphasized that  $\psi(t)$  has the property of finite-time convergence, while the regular performance function proposed in Reference 34 does not have this property. Moreover, it is clear from (4) that  $\psi(t)$  is easier to implement due to the mild initial condition  $\psi(0) = -\tanh(\psi_1) + \psi_2 + 1 > 0$  and the independence of system order  $n$ .

The objective (2) can be achieved by limiting the tracking error  $e_1(t) = x_1(t) - y_d(t)$  to the interval  $(-\zeta_1\psi(t), \zeta_2\psi(t))$ , namely

$$-\zeta_1\psi(t) < e_1(t) < \zeta_2\psi(t), \quad (5)$$

where  $\zeta_1 > 0$  and  $\zeta_2 > 0$  are positive design constants, and  $\psi(t)$  is a FTPF described as (4).

According to (4) and (5), it is known that  $-\zeta_1\psi(0)$  and  $\zeta_2\psi(0)$  denote the minimum value and the maximum value of the transient undershoot of the tracking error  $e_1(t)$ , respectively. In addition,  $T_c$  represents the time of the tracking error  $e_1(t)$  decaying to the steady-state value  $\psi_2$ .

**Lemma 3** (42).  $\psi(t)$ ,  $\dot{\psi}(t)$  are continuously differentiable and bounded on  $[0, +\infty)$ , and  $\ddot{\psi}(t)$  is continuous and bounded on  $[0, +\infty)$ .

### 2.3 | Stability theory preparation

To introduce the definitions and theorems of stochastic nonlinear systems, consider the following general stochastic system

$$dx = f(x)dt + g(x)d\omega, \quad (6)$$

where  $x \in R^n$  represents the state vector, and  $\omega$  denotes an  $r$ -dimensional independent standard Wiener process.  $f(\cdot) : R^n \rightarrow R^n$  and  $g(\cdot) : R^n \rightarrow R^{n \times r}$  are locally Lipschitz functions satisfying  $f(\mathbf{0}) = \mathbf{0}$  and  $g(\mathbf{0}) = \mathbf{0}$ .

**Definition 2** (15). For any given  $V(x) \in C^2$ ,  $LV$  means the differential operator of  $V$  associated with the stochastic system (6), which is defined in the following form

$$LV = \frac{\partial V}{\partial x} f + \frac{1}{2} Tr \left\{ g^T \frac{\partial^2 V}{\partial x^2} g \right\}, \quad (7)$$

where  $C^2$  represents the set of all functions with continuous second-order partial derivative and  $Tr\{\cdot\}$  represents the trace of  $\cdot$ .

**Lemma 4** (1). Consider the stochastic system (6), if there exists a positive definite, radially unbounded, twice continuously differentiable Lyapunov function  $V(x) : R^n \rightarrow R$ , and two positive constants  $a > 0$ ,  $b > 0$ , such that

$$LV(x) \leq -aV(x) + b, \quad (8)$$

then, the system (6) has a unique solution almost surely, and the system is bounded in probability.

### 2.4 | Multi-dimensional Taylor network

In this paper, the unknown nonlinear functions in the controller design process will be treated with MTN. In the previous works,<sup>47–49</sup> the theory related to MTN has been introduced, only the following Lemma is presented.

**Lemma 5** (49,50). Suppose  $\varphi(s)$  is a continuous nonlinear function defined on a compact set  $\Omega$ , then for  $\forall \epsilon > 0$ ,  $\varphi(s)$  can be approximated by  $\theta^T P_{m_n}(s)$  as follows

$$\varphi(s) = \theta^T P_{m_n}(s) + \delta(s), \quad (9)$$

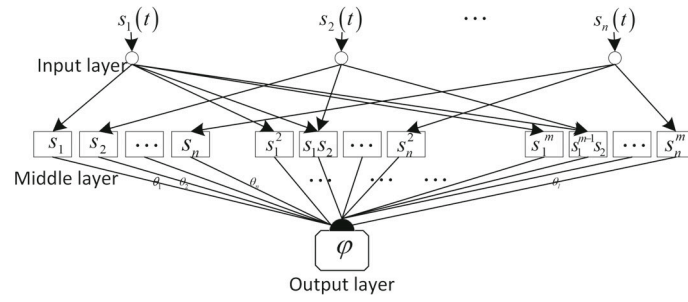


FIGURE 1 The topological structure of MTN.

where  $\mathbf{s} = [s_1, s_2, \dots, s_n]^T$  and  $\boldsymbol{\theta} = [\theta_1, \dots, \theta_n]^T$  represent the input vector and the weight vector of MTN, respectively.  $\delta(\mathbf{s})$  represents the approximation error with  $|\delta(\mathbf{s})| \leq \epsilon$ .  $P_{m_n}(\mathbf{s}) = [s_1, \dots, s_n, s_1^2, s_1s_2, \dots, s_n^2, \dots, s_1^m, s_1^{m-1}s_2, \dots, s_n^m]^T$  denotes the middle layer of MTN.

*Remark 2.* The topological structure of MTN is shown in Figure 1. As a network structure similar to radial basis function neural network (RBFNN),<sup>9</sup> MTN is composed of three layers: input layer, middle layer and output layer. The major difference between the MTN and RBFNN is the way of processing information of the middle layer. Unlike RBFNN, polynomials are adopted instead of radial basis functions in the middle layer of MTN, which can realize the approximation of nonlinear functions with less computation.<sup>13,14</sup>

### 3 | CONTROLLER DESIGN AND STABILITY ANALYSIS

In this section, an event-triggered adaptive MTN controller will be designed for the controlled system (1), which will be addressed in a step-by-step manner. For ease of representation,  $f_i(\bar{\mathbf{x}}_i)$  and  $g_i(\bar{\mathbf{x}}_i)$ ,  $i = 1, 2, \dots, n$  will be abbreviated below as  $f_i$  and  $g_i$ , respectively.

At the start, the following coordinate transformation is defined

$$z_i = x_i - \alpha_{i-1}, i = 2, 3, \dots, n \quad (10)$$

where  $\alpha_{i-1}$  represents the virtual control signal to be designed later.

#### 3.1 | Design of control strategy

*Step 1:* To convert the constrained tracking error  $e_1(t)$  into an equivalent unconstrained variable  $z_1$ , similar to the methodology of References 42,43, a smooth and strictly increasing transformation function  $\gamma(z_1)$  is introduced as follows

$$\gamma(z_1) = \frac{\zeta_2 e^{z_1} - \zeta_1 e^{-z_1}}{e^{z_1} + e^{-z_1}}, \quad (11)$$

which satisfies

$$\begin{cases} -\zeta_1 < \gamma(z_1) < \zeta_2 \\ \lim_{z_1 \rightarrow +\infty} \gamma(z_1) = \zeta_2, \lim_{z_1 \rightarrow -\infty} \gamma(z_1) = -\zeta_1. \end{cases} \quad (12)$$

In addition, (11) can be transformed into another form as follows

$$\gamma(z_1) = \zeta_2 - \frac{\zeta_1 + \zeta_2}{e^{2z_1} + 1}. \quad (13)$$

Based on (13), we have

$$e^{2z_1} = \frac{\zeta_1 + \gamma(z_1)}{\zeta_2 - \gamma(z_1)}. \tag{14}$$

According to (5), (11), and (12),  $e_1(t)$  can be expressed as

$$e_1(t) = \psi(t)\gamma(z_1). \tag{15}$$

From (14), we can further obtain  $z_1 = \frac{1}{2} \ln\left(\frac{\zeta_1 + \gamma(z_1)}{\zeta_2 - \gamma(z_1)}\right)$ , and from (15), we can obtain  $\gamma(z_1) = \frac{e_1(t)}{\psi(t)}$ . Therefore, the following equation holds

$$z_1 = \frac{1}{2} \ln\left(\frac{\zeta_1 + \gamma(z_1)}{\zeta_2 - \gamma(z_1)}\right) = \frac{1}{2} \ln\left(\frac{\zeta_1 + \frac{e_1(t)}{\psi(t)}}{\zeta_2 - \frac{e_1(t)}{\psi(t)}}\right). \tag{16}$$

*Remark 3.* Clearly, the variable  $z_1$  is unconstrained. From (16), we can get that  $\ln\left(\frac{\zeta_1 + \frac{e_1(t)}{\psi(t)}}{\zeta_2 - \frac{e_1(t)}{\psi(t)}}\right) = 0$  when  $z_1 \rightarrow 0$ , which implies  $e_1(t) = \frac{1}{2}\psi(t)(\zeta_2 - \zeta_1)$ . Therefore, the tracking error  $e_1(t)$  converges to  $(-\zeta_1\psi(t), \zeta_2\psi(t))$  when  $z_1 \rightarrow 0$ . In addition, according to (15) and (16), since  $\psi(t)$  is a strictly monotonically decreasing positive function,  $e_1(t)$  can be confined to the following set  $\Delta$  in a finite time  $T_c$ , that is

$$\Delta = \{e_1(t) \in R : |e_1(t)| < \max(\zeta_1, \zeta_2)\psi_2, t \geq T_c\}. \tag{17}$$

According to (16), one has

$$\dot{z}_1 = \zeta \left[ \dot{e}_1(t) - e_1(t) \frac{\dot{\psi}(t)}{\psi(t)} \right], \tag{18}$$

where  $\zeta = \left[ \frac{1}{2\psi(t)} \right] \left[ \frac{1}{\zeta_1 + \gamma(z_1)} + \frac{1}{\zeta_2 - \gamma(z_1)} \right]$ . Obviously,  $\zeta > 0$ .

From the system model (1) and (18), we have

$$dz_1 = \zeta \left[ x_2 + f_1 - \dot{y}_d - e_1(t) \frac{\dot{\psi}(t)}{\psi(t)} \right] dt + \zeta g_1^T d\omega. \tag{19}$$

Consider the first Lyapunov function candidate  $V_1$  as follows

$$V_1 = \frac{1}{4}z_1^4 + \frac{1}{2}\tilde{\theta}_1^T \Gamma_1^{-1} \tilde{\theta}_1, \tag{20}$$

where  $\theta_1$  denotes the weight vector of MTN and  $\hat{\theta}_1$  denotes the estimation of  $\theta_1$ .  $\tilde{\theta}_1 = \theta_1 - \hat{\theta}_1$  denotes the parameter error vector, and  $\Gamma_1 = \Gamma_1^T > 0$  is a constant matrix.

Then, according to Definition 2 and (19), we have

$$LV_1 = z_1^3 \zeta \left[ x_2 + f_1 - \dot{y}_d - e_1(t) \frac{\dot{\psi}(t)}{\psi(t)} \right] + \frac{3}{2}z_1^2 \zeta^2 g_1^T g_1 - \tilde{\theta}_1^T \Gamma_1^{-1} \dot{\tilde{\theta}}_1. \tag{21}$$

By using Lemma 1, the following inequality holds

$$\frac{3}{2}z_1^2 \zeta^2 g_1^T g_1 \leq \frac{3}{4l_1^2} z_1^4 \zeta^4 \|g_1\|^4 + \frac{3}{4}l_1^2, \tag{22}$$

where  $l_1 > 0$  is a constant.

Substituting (22) into (21), one has

$$\begin{aligned} LV_1 &\leq z_1^3 \zeta \left[ x_2 + f_1 - \dot{y}_d - e_1(t) \frac{\dot{\psi}(t)}{\psi(t)} \right] + \frac{3}{4l_1^2} z_1^4 \zeta^4 \|g_1\|^4 + \frac{3}{4} l_1^2 - \hat{\theta}_1^T \Gamma_1^{-1} \dot{\hat{\theta}}_1 \\ &\leq z_1^3 \zeta x_2 + z_1^3 \bar{f}_1 - \frac{3}{4} z_1^4 + \frac{3}{4} l_1^2 - \hat{\theta}_1^T \Gamma_1^{-1} \dot{\hat{\theta}}_1, \end{aligned} \quad (23)$$

where  $\bar{f}_1 = \zeta \left[ f_1 - \dot{y}_d - e_1(t) \frac{\dot{\psi}(t)}{\psi(t)} \right] + \frac{3}{4} z_1 + \frac{3}{4l_1^2} z_1^4 \zeta^4 \|g_1\|^4$ .

It is worth noting that  $\bar{f}_1$  contains unknown nonlinear functions, which cannot be directly used to design the controller. According to Lemma 5, for any given  $\varepsilon_1 > 0$ , there exists a  $\theta_1^T P_{m1}(\mathbf{Z}_1)$ , such that

$$\bar{f}_1 = \theta_1^T P_{m1}(\mathbf{Z}_1) + \delta_1(\mathbf{Z}_1), |\delta_1(\mathbf{Z}_1)| \leq \varepsilon_1, \quad (24)$$

where  $\delta_1(\mathbf{Z}_1)$  represents the approximation error,  $\mathbf{Z}_1 = [z_1]^T$ .

Combining (10) and (24), (23) can be reduced to the following form

$$LV_1 \leq z_1^3 \zeta z_2 + z_1^3 \zeta \alpha_1 + z_1^3 \theta_1^T P_{m1}(\mathbf{Z}_1) + z_1^3 \delta_1(\mathbf{Z}_1) - \frac{3}{4} z_1^4 + \frac{3}{4} l_1^2 - \hat{\theta}_1^T \Gamma_1^{-1} \dot{\hat{\theta}}_1. \quad (25)$$

By using Lemma 1 again, we can obtain

$$z_1^3 \zeta z_2 \leq \frac{3}{4} z_1^4 + \frac{1}{4} \zeta^4 z_2^4, \quad (26)$$

$$z_1^3 \delta_1(\mathbf{Z}_1) \leq |z_1|^3 \varepsilon_1 \leq \frac{3}{4} z_1^4 + \frac{1}{4} \varepsilon_1^4. \quad (27)$$

Design the first virtual control signal  $\alpha_1$  as follows

$$\alpha_1 = \frac{1}{\zeta} \left( -k_1 z_1 - \hat{\theta}_1^T P_{m1}(\mathbf{Z}_1) \right), \quad (28)$$

where  $k_1 > \frac{3}{4}$  is a design constant.

The first adaptive law  $\dot{\hat{\theta}}_1$  is constructed in the following form

$$\dot{\hat{\theta}}_1 = \Gamma_1 P_{m1}(\mathbf{Z}_1) z_1^3 - \Gamma_1 \eta_1 \hat{\theta}_1, \quad (29)$$

where  $\eta_1 > 0$  is a design constant.

By substituting (26)–(29) into (25), the following inequality is easily established

$$LV_1 \leq -\left(k_1 - \frac{3}{4}\right) z_1^4 + \frac{1}{4} \zeta^4 z_2^4 + \frac{1}{4} \varepsilon_1^4 + \frac{3}{4} l_1^2 + \eta_1 \hat{\theta}_1^T \dot{\hat{\theta}}_1. \quad (30)$$

*Step 2:* Based on (1) and (10), we have

$$dz_2 = (x_3 + f_2 - L\alpha_1)dt + \left(g_2 - \frac{\partial \alpha_1}{\partial x_1} g_1\right)^T d\omega, \quad (31)$$

where  $L\alpha_1 = \frac{\partial \alpha_1}{\partial x_1} (x_2 + f_1) + \sum_{k=0}^1 \frac{\partial \alpha_1}{\partial y_d^{(k)}} y_d^{(k+1)} + \frac{\partial \alpha_1}{\partial \hat{\theta}_1} \dot{\hat{\theta}}_1 + \frac{1}{2} \frac{\partial^2 \alpha_1}{\partial x_1^2} g_1^T g_1$ .

Consider the second Lyapunov function candidate as follows

$$V_2 = V_1 + \frac{1}{4} z_2^4 + \frac{1}{2} \tilde{\theta}_2^T \Gamma_2^{-1} \tilde{\theta}_2, \quad (32)$$

where  $\theta_2$  denotes the weight vector of MTN and  $\hat{\theta}_2$  denotes the estimation of  $\theta_2$ .  $\tilde{\theta}_2 = \theta_2 - \hat{\theta}_2$  denotes the parameter error vector, and  $\Gamma_2 = \Gamma_2^T > 0$  is a constant matrix.

Then, according to Definition 2 and (31), we have

$$LV_2 = LV_1 + z_2^3(x_3 + f_2 - L\alpha_1) + \frac{3}{2}z_2^2 \left( g_2 - \frac{\partial \alpha_1}{\partial x_1} g_1 \right)^T \left( g_2 - \frac{\partial \alpha_1}{\partial x_1} g_1 \right) - \tilde{\theta}_2^T \Gamma_2^{-1} \dot{\hat{\theta}}_2. \quad (33)$$

Similar to step 1, according to Lemma 1, the following inequality holds

$$\frac{3}{2}z_2^2 \left( g_2 - \frac{\partial \alpha_1}{\partial x_1} g_1 \right)^T \left( g_2 - \frac{\partial \alpha_1}{\partial x_1} g_1 \right) \leq \frac{3}{4l_2^2} z_2^4 \left\| g_2 - \frac{\partial \alpha_1}{\partial x_1} g_1 \right\|^4 + \frac{3}{4} l_2^2, \quad (34)$$

where  $l_2 > 0$  is a constant.

According to (30) and (34), (33) can be converted into the following form

$$LV_2 \leq -\left(k_1 - \frac{3}{4}\right)z_1^4 + \frac{1}{4}\varepsilon_1^4 + \frac{3}{4} \sum_{j=1}^2 l_j^2 + \eta_1 \tilde{\theta}_1^T \hat{\theta}_1 + z_2^3(x_3 + \bar{f}_2) - \frac{1}{2}z_2^4 - \tilde{\theta}_2^T \Gamma_2^{-1} \dot{\hat{\theta}}_2, \quad (35)$$

where  $\bar{f}_2 = f_2 - L\alpha_1 + \frac{3}{4l_2^2} z_2 \left\| g_2 - \frac{\partial \alpha_1}{\partial x_1} g_1 \right\|^4 + \frac{1}{2}z_2 + \frac{1}{4}\varepsilon_1^4 z_2$ .

Similarly,  $\bar{f}_2$  cannot be directly used in the design of the controller. According to Lemma 5,  $\theta_2^T P_{m2}(\mathbf{Z}_2)$  is used to approximate  $\bar{f}_2$ . Specifically, for any given  $\varepsilon_2 > 0$ , the following inequality holds

$$\bar{f}_2 = \theta_2^T P_{m2}(\mathbf{Z}_2) + \delta_2(\mathbf{Z}_2), |\delta_2(\mathbf{Z}_2)| \leq \varepsilon_2, \quad (36)$$

where  $\delta_2(\mathbf{Z}_2)$  represents the approximation error,  $\mathbf{Z}_2 = [z_1, z_2]^T$ .

Combining (10) and (35), (36), we have

$$\begin{aligned} LV_2 \leq & -\left(k_1 - \frac{3}{4}\right)z_1^4 + \frac{1}{4}\varepsilon_1^4 + \frac{3}{4} \sum_{j=1}^2 l_j^2 + \eta_1 \tilde{\theta}_1^T \hat{\theta}_1 + z_2^3(z_3 + \alpha_2) \\ & + z_2^3 \theta_2^T P_{m2}(\mathbf{Z}_2) + z_2^3 \delta_2(\mathbf{Z}_2) - \frac{1}{2}z_2^4 - \tilde{\theta}_2^T \Gamma_2^{-1} \dot{\hat{\theta}}_2. \end{aligned} \quad (37)$$

The second virtual control signal  $\alpha_2$  and the adaptive law  $\dot{\hat{\theta}}_2$  are constructed as follows

$$\alpha_2 = -k_2 z_2 - \hat{\theta}_2^T P_{m2}(\mathbf{Z}_2), \quad (38)$$

$$\dot{\hat{\theta}}_2 = \Gamma_2 P_{m2}(\mathbf{Z}_2) z_2^3 - \Gamma_2 \eta_2 \hat{\theta}_2, \quad (39)$$

where  $k_2 > 1$  and  $\eta_2 > 0$  are design constants.

By quoting Lemma 1 and substituting (38) and (39) into (37), the following inequality is obtained

$$LV_2 \leq -\left(k_1 - \frac{3}{4}\right)z_1^4 - (k_2 - 1)z_2^4 + \frac{1}{4} \sum_{j=1}^2 \varepsilon_j^4 + \frac{3}{4} \sum_{j=1}^2 l_j^2 + \sum_{j=1}^2 \eta_j \tilde{\theta}_j^T \hat{\theta}_j + \frac{1}{4}z_3^4. \quad (40)$$

Step  $i$  ( $3 \leq i \leq n - 1$ ): Similar to step 2, from (1) to (10), we have

$$dz_i = (x_{i+1} + f_i - L\alpha_{i-1})dt + \left( g_i - \sum_{k=1}^{i-1} \frac{\partial \alpha_{i-1}}{\partial x_k} g_k \right)^T d\omega, \quad (41)$$

where  $L\alpha_{i-1} = \sum_{k=1}^{i-1} \frac{\partial \alpha_{i-1}}{\partial x_k} (x_{k+1} + f_k) + \sum_{k=0}^{i-1} \frac{\partial \alpha_{i-1}}{\partial y_d^{(k)}} y_d^{(k+1)} + \frac{\partial \alpha_{i-1}}{\partial \hat{\theta}_{i-1}} \dot{\hat{\theta}}_{i-1} + \frac{1}{2} \sum_{p,q=1}^{i-1} \frac{\partial^2 \alpha_{i-1}}{\partial x_p \partial x_q} g_p^T g_q$ .

Consider the  $i$ -th Lyapunov function candidate as follows

$$V_i = V_{i-1} + \frac{1}{4}z_i^4 + \frac{1}{2}\tilde{\theta}_i^T \Gamma_i^{-1} \tilde{\theta}_i, \quad (42)$$

where  $\theta_i$  denotes the weight vector of MTN and  $\hat{\theta}_i$  denotes the estimation of  $\theta_i$ .  $\tilde{\theta}_i = \theta_i - \hat{\theta}_i$  denotes the parameter error vector, and  $\Gamma_i = \Gamma_i^T > 0$  is a constant matrix.

Then, according to Definition 2 and (41), we have

$$\begin{aligned} LV_i &= LV_{i-1} + z_i^3(x_{i+1} + f_i - L\alpha_{i-1}) - \tilde{\theta}_i^T \Gamma_i^{-1} \dot{\tilde{\theta}}_i \\ &\quad + \frac{3}{2}z_i^2 \left( g_i - \sum_{k=1}^{i-1} \frac{\partial \alpha_{i-1}}{\partial x_k} g_k \right)^T \left( g_i - \sum_{k=1}^{i-1} \frac{\partial \alpha_{i-1}}{\partial x_k} g_k \right). \end{aligned} \quad (43)$$

Based on Lemma 1, the following inequality holds

$$\frac{3}{2}z_i^2 \left( g_i - \sum_{k=1}^{i-1} \frac{\partial \alpha_{i-1}}{\partial x_k} g_k \right)^T \left( g_i - \sum_{k=1}^{i-1} \frac{\partial \alpha_{i-1}}{\partial x_k} g_k \right) \leq \frac{3}{4l_i^2} z_i^4 \left\| g_i - \sum_{k=1}^{i-1} \frac{\partial \alpha_{i-1}}{\partial x_k} g_k \right\|^4 + \frac{3}{4}l_i^2, \quad (44)$$

where  $l_i > 0$  is a constant.

Similar to step 2, substituting (44) into (43), one has

$$\begin{aligned} LV_i &\leq -\left(k_1 - \frac{3}{4}\right)z_1^4 - \sum_{j=2}^{i-1} (k_j - 1)z_j^4 + \frac{3}{4} \sum_{j=1}^i l_j^2 + z_i^3(x_{i+1} + \bar{f}_i) \\ &\quad - \frac{1}{2}z_i^4 - \tilde{\theta}_i^T \Gamma_i^{-1} \dot{\tilde{\theta}}_i + \sum_{j=1}^{i-1} \eta_j \tilde{\theta}_j^T \dot{\tilde{\theta}}_j + \frac{1}{4} \sum_{j=1}^{i-1} \epsilon_j^4, \end{aligned} \quad (45)$$

where  $\bar{f}_i = f_i - L\alpha_{i-1} + \frac{3}{4l_i^2} z_i^4 \left\| g_i - \sum_{k=1}^{i-1} \frac{\partial \alpha_{i-1}}{\partial x_k} g_k \right\|^4 + \frac{3}{4}z_i$ .

Similarly,  $\bar{f}_i$  cannot be directly used in the design of the controller. According to Lemma 5,  $\theta_i^T P_{mi}(\mathbf{Z}_i)$  is used to approximate  $\bar{f}_i$ . Specifically, for any given  $\epsilon_i > 0$ , we have

$$\bar{f}_i = \theta_i^T P_{mi}(\mathbf{Z}_i) + \delta_i(\mathbf{Z}_i), \quad |\delta_i(\mathbf{Z}_i)| \leq \epsilon_i, \quad (46)$$

where  $\delta_i(\mathbf{Z}_i)$  represents the approximation error,  $\mathbf{Z}_i = [z_1, \dots, z_i]^T$ .

Then, the construction of the virtual control signal  $\alpha_i$  and the adaptive law  $\dot{\hat{\theta}}_i$  are constructed as follows

$$\alpha_i = -k_i z_i - \hat{\theta}_i^T P_{mi}(\mathbf{Z}_i), \quad (47)$$

$$\dot{\hat{\theta}}_i = \Gamma_i P_{mi}(\mathbf{Z}_i) z_i^3 - \Gamma_i \eta_i \hat{\theta}_i, \quad (48)$$

where  $k_i > 1$  and  $\eta_i > 0$  are design constants.

By substituting (46)–(48) into (45) and quoting Lemma 1, the following inequality is obtained

$$LV_i \leq -\left(k_1 - \frac{3}{4}\right)z_1^4 - \sum_{j=2}^i (k_j - 1)z_j^4 + \frac{1}{4} \sum_{j=1}^i \epsilon_j^4 + \frac{3}{4} \sum_{j=1}^i l_j^2 + \frac{1}{4}z_{i+1}^4 + \sum_{j=1}^i \eta_j \tilde{\theta}_j^T \dot{\tilde{\theta}}_j. \quad (49)$$

*Step n:* Similar to step  $i$ , from (1) to (10), we have

$$dz_n = (u + f_n - L\alpha_{n-1})dt + \left( g_n - \sum_{k=1}^{n-1} \frac{\partial \alpha_{n-1}}{\partial x_k} g_k \right)^T d\omega, \quad (50)$$

where  $L\alpha_{n-1} = \sum_{k=1}^{n-1} \frac{\partial \alpha_{n-1}}{\partial x_k} (x_{k+1} + f_k) + \sum_{k=0}^{n-1} \frac{\partial \alpha_{n-1}}{\partial y_d^{(k)}} y_d^{(k+1)} + \frac{\partial \alpha_{n-1}}{\partial \theta_{n-1}} \dot{\theta}_{n-1} + \frac{1}{2} \sum_{p,q=1}^{n-1} \frac{\partial^2 \alpha_{n-1}}{\partial x_p \partial x_q} g_p^T g_q$ .

Consider the  $n$ -th Lyapunov function candidate as follows

$$V_n = V_{n-1} + \frac{1}{4}z_n^4 + \frac{1}{2}\tilde{\theta}_n^T \Gamma_n^{-1} \tilde{\theta}_n, \tag{51}$$

where  $\theta_n$  denotes the weight vector of MTN and  $\hat{\theta}_n$  denotes the estimation of  $\theta_n$ .  $\tilde{\theta}_n = \theta_n - \hat{\theta}_n$  denotes the parameter error vector, and  $\Gamma_n = \Gamma_n^T > 0$  is a constant matrix.

Then, according to Definition 2 and (50), we have

$$\begin{aligned} LV_n &= LV_{n-1} + z_n^3(u + f_n - L\alpha_{n-1}) - \tilde{\theta}_n^T \Gamma_n^{-1} \dot{\hat{\theta}}_n \\ &\quad + \frac{3}{2}z_n^2 \left( g_n - \sum_{k=1}^{n-1} \frac{\partial \alpha_{n-1}}{\partial x_k} g_k \right)^T \left( g_n - \sum_{k=1}^{n-1} \frac{\partial \alpha_{n-1}}{\partial x_k} g_k \right). \end{aligned} \tag{52}$$

With the aid of Lemma 1, the following inequality holds

$$\frac{3}{2}z_n^2 \left( g_n - \sum_{k=1}^{n-1} \frac{\partial \alpha_{n-1}}{\partial x_k} g_k \right)^T \left( g_n - \sum_{k=1}^{n-1} \frac{\partial \alpha_{n-1}}{\partial x_k} g_k \right) \leq \frac{3}{4l_n^2} z_n^4 \left\| g_n - \sum_{k=1}^{n-1} \frac{\partial \alpha_{n-1}}{\partial x_k} g_k \right\|^4 + \frac{3}{4}l_n^2, \tag{53}$$

where  $l_n > 0$  is a constant.

Substituting (53) into (52), one has

$$\begin{aligned} LV_n &\leq -\left(k_1 - \frac{3}{4}\right)z_1^4 - \sum_{j=2}^{n-1} (k_j - 1)z_j^4 + \frac{3}{4} \sum_{j=1}^n l_j^2 + z_n^3(u + \bar{f}_n) \\ &\quad + \frac{1}{4}z_n^4 - \tilde{\theta}_n^T \Gamma_n^{-1} \dot{\hat{\theta}}_n + \sum_{j=1}^{n-1} \eta_j \tilde{\theta}_j^T \dot{\hat{\theta}}_j + \frac{1}{4} \sum_{j=1}^{n-1} \epsilon_j^4, \end{aligned} \tag{54}$$

where  $\bar{f}_n = f_n - L\alpha_{n-1} + \frac{3}{4l_n^2} z_n \left\| g_n - \sum_{k=1}^{n-1} \frac{\partial \alpha_{n-1}}{\partial x_k} g_k \right\|^4$ .

Since  $\bar{f}_n$  contains unknown functions,  $\bar{f}_n$  cannot be directly used in the design of the controller. According to Lemma 5, for any given  $\epsilon_n > 0$ ,  $\theta_n^T P_{mn}(\mathbf{Z}_n)$  is used to approximate  $\bar{f}_n$  as follows

$$\bar{f}_n = \theta_n^T P_{mn}(\mathbf{Z}_n) + \delta_n(\mathbf{Z}_n), |\delta_n(\mathbf{Z}_n)| \leq \epsilon_n, \tag{55}$$

where  $\delta_n(\mathbf{Z}_n)$  represents the approximation error,  $\mathbf{Z}_n = [z_1, \dots, z_n]^T$ .

Similar to step  $i$ , by substituting (55) into (54) and quoting Lemma 1, we can obtain

$$\begin{aligned} LV_n &\leq -\left(k_1 - \frac{3}{4}\right)z_1^4 - \sum_{j=2}^{n-1} (k_j - 1)z_j^4 + \frac{1}{4} \sum_{j=1}^n \epsilon_j^4 + \frac{3}{4} \sum_{j=1}^n l_j^2 + z_n^3 u \\ &\quad + z_n^3 \theta_n^T P_{mn}(\mathbf{Z}_n) + z_n^4 - \tilde{\theta}_n^T \Gamma_n^{-1} \dot{\hat{\theta}}_n + \sum_{j=1}^{n-1} \eta_j \tilde{\theta}_j^T \dot{\hat{\theta}}_j. \end{aligned} \tag{56}$$

Based on the above analysis, the event-triggered control strategy is designed as follows

$$v(t) = -(1 + \lambda) \left[ \alpha_n \tanh\left(\frac{z_n^3 \alpha_n}{\rho}\right) + m' \tanh\left(\frac{z_n^3 m'}{\rho}\right) \right], \tag{57}$$

$$\alpha_n = -k_n z_n - \hat{\theta}_n^T P_{mn}(\mathbf{Z}_n), \tag{58}$$

$$\dot{\hat{\theta}}_n = \Gamma_n P_{mn}(\mathbf{Z}_n) z_n^3 - \Gamma_n \eta_n \hat{\theta}_n, \tag{59}$$

$$u(t) = v(t_k), \forall t \in [t_k, t_{k+1}), \quad (60)$$

$$t_{k+1} = \inf \{t \in R \mid |e(t)| \geq \lambda |u(t)| + m\}, e(t) = v(t) - u(t), \quad (61)$$

where  $0 < \lambda < 1$ ,  $m > 0$ ,  $m' > \frac{m}{1-\lambda}$ ,  $\eta_n > 0$ ,  $k_n > 1$  and  $\rho$  are positive design constants,  $t_k$  ( $k \in Z^+$ ) represents the controller update time.

According to (60) and (61), for  $\forall t \in [t_k, t_{k+1})$ , one has

$$v(t) = [1 + w_1(t)\lambda]u(t) + w_2(t)m, \quad (62)$$

where  $w_1(t)$  and  $w_2(t)$  are time-varying parameters with  $|w_1(t)| \leq 1$  and  $|w_2(t)| \leq 1$ .

Considering the definition and property of the function  $\tanh(\cdot)$ , it is easy to know that  $\forall t \in R, \zeta > 0, -t \tanh(t/\zeta) \leq 0$ . Therefore, based on  $\rho > 0$  and  $0 < \lambda < 1$ , we can conclude  $z_n^3 v(t) = (1 + \lambda) \left[ -\alpha_n z_n^3 \tanh\left(\frac{z_n^3 \alpha_n}{\rho}\right) - m' z_n^3 \tanh\left(\frac{z_n^3 m'}{\rho}\right) \right] \leq 0$ . Furthermore, taking  $|w_1(t)| \leq 1$  and  $|w_2(t)| \leq 1$  into account, the following two inequalities hold

$$\frac{z_n^3 v(t)}{1 + w_1(t)\lambda} \leq \frac{z_n^3 v(t)}{1 + \lambda}, \quad (63)$$

$$-\frac{z_n^3 w_2(t)m}{1 + w_1(t)\lambda} \leq \left| \frac{z_n^3 m}{1 - \lambda} \right|. \quad (64)$$

According to  $m' > \frac{m}{1-\lambda}$ , we have  $-|m' z_n^3| + \left| \frac{z_n^3 m}{1-\lambda} \right| < 0$ . Then, based on (57)–(64) and Lemma 2, one has

$$\begin{aligned} z_n^3 u &= \frac{z_n^3 v(t)}{1 + w_1(t)\lambda} - \frac{z_n^3 w_2(t)m}{1 + w_1(t)\lambda} \\ &\leq -\alpha_n z_n^3 \tanh\left(\frac{z_n^3 \alpha_n}{\rho}\right) - m' z_n^3 \tanh\left(\frac{z_n^3 m'}{\rho}\right) + \left| \frac{z_n^3 m}{1 - \lambda} \right| \\ &\leq \left| \alpha_n z_n^3 \right| - \alpha_n z_n^3 \tanh\left(\frac{z_n^3 \alpha_n}{\rho}\right) + \left| m' z_n^3 \right| - m' z_n^3 \tanh\left(\frac{z_n^3 m'}{\rho}\right) + \alpha_n z_n^3 - \left| m' z_n^3 \right| + \left| \frac{z_n^3 m}{1 - \lambda} \right| \\ &\leq 0.2785\rho + 0.2785\rho + \alpha_n z_n^3 \\ &\leq 0.557\rho + \alpha_n z_n^3. \end{aligned} \quad (65)$$

Substituting (58), (59) and (65) into (56), the following inequality holds

$$LV_n \leq -\left(k_1 - \frac{3}{4}\right)z_1^4 - \sum_{j=2}^n (k_j - 1)z_j^4 + \frac{1}{4} \sum_{j=1}^n \varepsilon_j^4 + \frac{3}{4} \sum_{j=1}^n l_j^2 + 0.557\rho + \sum_{j=1}^n \eta_j \tilde{\theta}_j^T \hat{\theta}_j. \quad (66)$$

Then, by quoting Lemma 1, we have

$$\sum_{j=1}^n \eta_j \tilde{\theta}_j^T \hat{\theta}_j \leq -\sum_{j=1}^n \frac{\eta_j}{2\lambda_{\max}(\Gamma_j^{-1})} \tilde{\theta}_j^T \Gamma_j^{-1} \tilde{\theta}_j + \frac{1}{2} \sum_{j=1}^n \eta_j \|\theta_j\|^2. \quad (67)$$

Substituting (67) into (66), we can obtain

$$LV_n \leq -\sum_{j=1}^n c_j z_j^4 - \frac{1}{2} \sum_{j=1}^n \bar{\eta}_j \tilde{\theta}_j^T \Gamma_j^{-1} \tilde{\theta}_j + \frac{1}{4} \sum_{j=1}^n \varepsilon_j^4 + \frac{3}{4} \sum_{j=1}^n l_j^2 + \frac{1}{2} \sum_{j=1}^n \eta_j \|\theta_j\|^2 + 0.557\rho, \quad (68)$$

where  $c_1 = k_1 - \frac{3}{4}$ ,  $c_j = k_j - 1$  ( $j = 2, 3, \dots, n$ ),  $\bar{\eta}_j = \min\{\eta_j / (\lambda_{\max}(\Gamma_j^{-1})) \mid j = 1, 2, \dots, n\}$ .

### 3.2 | Stability analysis

The stability analysis of the controlled system (1) is presented by the following theorem.

**Theorem 1.** *Under Assumption 1, considering the controlled system (1) with the predetermined performance (5), for any initial values  $e_1(0)$  satisfying (5), there exists a control strategy composed by the virtual control signals (28), (38), (47) and (58), the adaptive laws (29), (39), (48) and (59), the adaptive controller (57) with the event-triggered conditions (60) and (61), such that:*

- (1) all the closed-loop signals are bounded on  $[0, +\infty)$  in probability.
- (2) the tracking error  $e_1$  converges to a small residual set of zero with performance constraint (5).
- (3) the Zeno behavior is avoided successfully.

*Proof.* In the first place, we prove that all signals of the closed-loop system (1) are bounded in probability.

The whole Lyapunov function candidate  $V$  is constructed as

$$V = \sum_{k=1}^n \frac{1}{4} z_k^4 + \sum_{k=1}^n \frac{1}{2} \tilde{\theta}_k^T \Gamma_k^{-1} \tilde{\theta}_k. \tag{69}$$

From (68) and (69), we have

$$LV \leq -a_0 V + b_0. \tag{70}$$

where  $a_0 = \min \{4c_j, \bar{\eta}_j | j = 1, 2, \dots, n\}$ , and  $b_0 = \frac{1}{4} \sum_{j=1}^n \varepsilon_j^4 + \frac{3}{4} \sum_{j=1}^n l_j^2 + 0.557\xi + \frac{1}{2} \sum_{j=1}^n \eta_j \|\theta_j\|^2$ .

According to Lemma 4 and (70), we can conclude that  $V$  is bounded in probability. Then, taking expectations on both sides of (70) and multiplying it by  $e^{a_0 t}$ , one has  $d(e^{a_0 t} E(V)) \leq b_0 e^{a_0 t}$ . Furthermore, integrating it on  $[0, t]$  as follows

$$E[V] \leq E(V(0))e^{-a_0 t} + \frac{b_0}{a_0} \leq E(V(0)) + \frac{b_0}{a_0}. \tag{71}$$

From (69) and (71), the following two inequalities hold

$$E[|z_k|] \leq \sqrt[4]{E(V(0)) + \frac{b_0}{a_0}}, \tag{72}$$

$$E \left[ \left| \sum_{k=1}^n \frac{1}{2} \tilde{\theta}_k^T \Gamma_k^{-1} \tilde{\theta}_k \right| \right] \leq E(V(0)) + \frac{b_0}{a_0}. \tag{73}$$

Based on (72) and (73), we can conclude that  $z_k$  and  $\|\tilde{\theta}_k\|$  are bounded in probability. It follows from (28), (38), (47), (57), (58) and (62) that  $\alpha_i$ ,  $u$ , and  $v$  are bounded in probability. Since  $x_i = z_i + \alpha_{i-1}$ , we can conclude that  $x_i$  is bounded in probability. The above analysis proves that all signals of the closed-loop system (1) are bounded in probability.

In the second place, we prove that the tracking error converges to a small residual set of zero with performance constraint (5).

From (70), we naturally obtain that

$$LV_1 \leq -a_0 V_1 + b_0. \tag{74}$$

Then, multiplying both sides of (74) by  $e^{a_0 t}$  and integrating it on  $[0, t]$  as follows

$$V_1(t) \leq a_0^* + [V_1(0) - a_0^*]e^{-a_0 t}, \tag{75}$$

where  $a_0^* = b_0/a_0$ .

According to (75) and (20), we can obtain  $\lim_{t \rightarrow \infty} |z_1| \leq \sqrt[4]{4a_0^*}$ . By choosing appropriate design parameters  $c_j, \eta_j, \epsilon_j, l_j$  and matrix  $\Gamma_j, z_1$  can converge to a small residual set of zero. Based on the error transformation (16), we can easily conclude that the tracking error  $e_1$  can also converge to a small residual set of zero. In practical applications, the design parameters should be chosen appropriately to meet specific requirements.

At last, we need to prove that the proposed controller can avoid the Zeno behavior. In other words, there exists a positive constant  $t^*$ , for  $\forall k \in Z^+$ , such that  $\{t_{k+1} - t_k\} \geq t^*$ , where  $t^*$  denotes the lower bound of the minimum inter-execution interval.

From  $e(t) = v(t) - u(t), \forall t \in [t_k, t_{k+1})$ , we have

$$\frac{d|e(t)|}{dt} = \frac{d}{dt}(e \times e)^{\frac{1}{2}} = \text{sign}(e)\dot{e} \leq |\dot{v}|. \quad (76)$$

Based on (57) and (58), we have the conclusion that since all terms contained in  $\alpha_n$  are bounded and have continuous derivatives, there exists  $\dot{v}$  which is bounded. In other words, there must exist a constant  $M > 0$ , such that  $|\dot{v}| \leq M$ . From  $e(t_k) = 0$  and  $\lim_{t \rightarrow t_{k+1}} e(t) = \lambda|u(t)| + m > m$ , we know that the lower bound of the inter-execution interval  $t^*$  must satisfy  $t^* \geq m/M > 0$ , so Zeno behavior cannot occur.

In summary, the proof of Theorem 1 is complete. ■

*Remark 4.* Based on the above analysis, it can be seen that our control strategy has significant advantages. In practical engineering, in order to obtain the desired tracking accuracy and convergence time, the user must repeatedly adjust the parameters to achieve the goal, which is a time-consuming and laborious process. However, in this paper, by introducing FTPF, tracking accuracy and convergence time are considered, and they can be predetermined by adjusting the parameters of FTPF.

## 4 | SIMULATION EXPERIMENT

In this section, a numerical example and a practical example are used to illustrate the effectiveness of the control strategy proposed in this paper.

**Example 1.** To verify the effectiveness of the proposed control strategy, the following second-order stochastic nonlinear system is considered:

$$\begin{cases} dx_1 = (x_2 + 0.2x_1 \sin(x_1))dt + 0.1x_1 d\omega \\ dx_2 = (u - x_1 \cos(x_2^2))dt + 0.1x_2 d\omega \\ y = x_1 \end{cases} \quad (77)$$

with the initial state satisfies  $x_1(0) = x_2(0) = 0$ , the reference trajectory is selected as  $y_d = \sin(t)$ .

In the simulation, the control structure is chosen in the same way as Theorem 1. The parameters of FTPF  $\psi(t)$  are taken as  $\psi_1 = 0.8, \psi_2 = 0.03, T_c = 5$ . The parameters of control strategy are designed as  $\varsigma_1 = 8.1, \varsigma_2 = 8.1, \lambda = 0.01, \rho = 0.001, m' = 3$ . The parameters of MTN are selected in two cases, (i) case 1:  $k_1 = 9, k_2 = 100, \eta_1 = 12, \eta_2 = 20$ ; (ii) case 2:  $k_1 = 1, k_2 = 45, \eta_1 = 11, \eta_2 = 10$ . The simulation results are shown in Figures 2–6.

Figure 2 illustrates that the system output  $y$  can track the desired reference signal  $y_d$  closely under two cases, which indicates that the choice of design parameters may affect the initial tracking performance, but not affect the final tracking performance. The responses of tracking error  $e_1(t)$  in two cases are shown in Figure 3, it can be seen that the tracking error can converge to the prescribed performance constraint. Figure 4 shows the boundedness of  $u$  and  $v$  in case 2. Figure 5 shows the response of the state variable  $x_2$  in case 2. Figure 6 represents the time between two adjacent events, which indicates that Zeno behavior does not occur.

**Example 2.** In order to verify the applicability of the proposed control strategy, a class of single link robot arm dynamics system is considered. According to the work of Reference 51, its system can be represented as

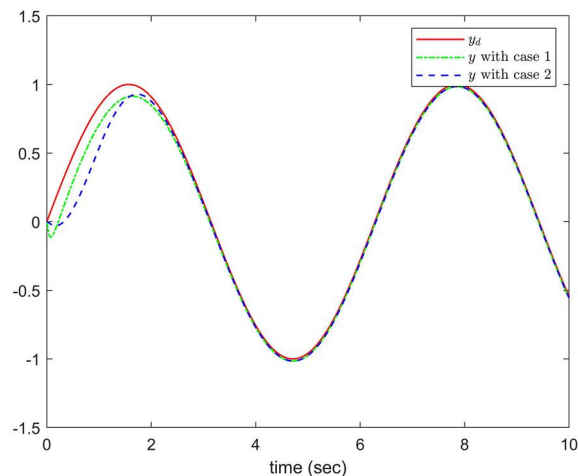


FIGURE 2 The responses of  $y_d$  and  $y$  of Example 1 in two cases.

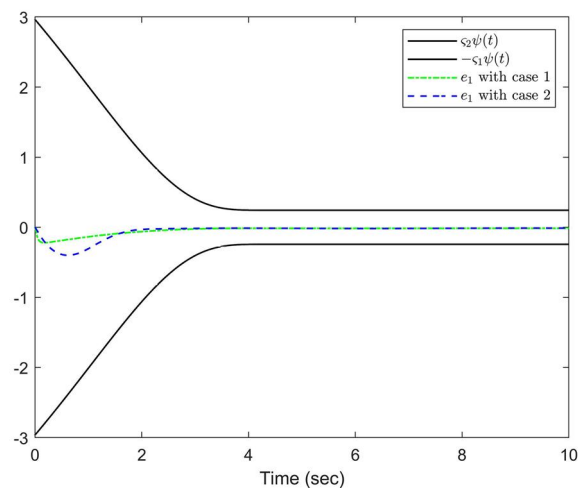


FIGURE 3 The responses of  $e_1$  with performance constraint of Example 1 in two cases.

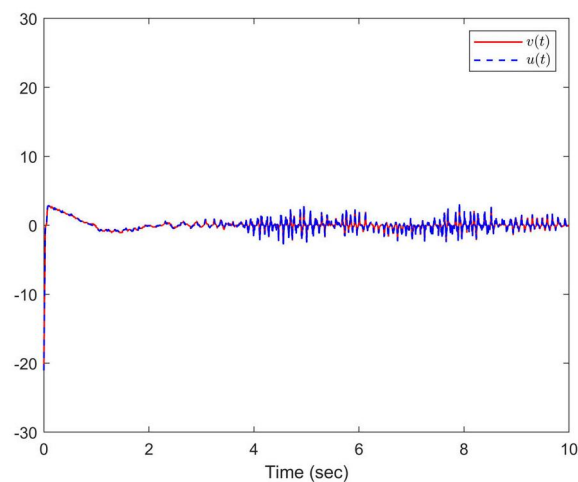


FIGURE 4 The responses of  $v(t)$  and  $u(t)$  of Example 1 in case 2.

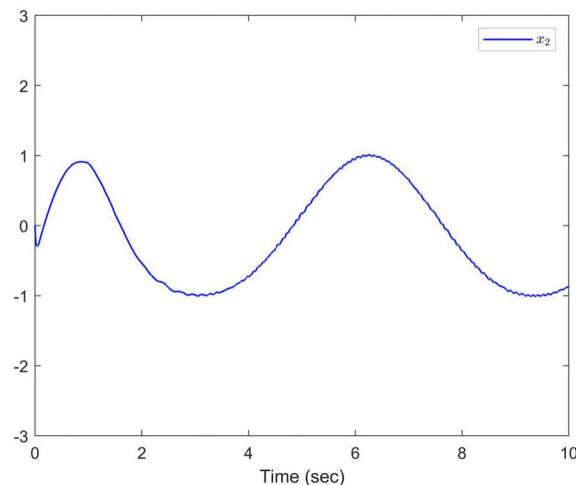


FIGURE 5 The response of state variable  $x_2$  of Example 1 in case 2.

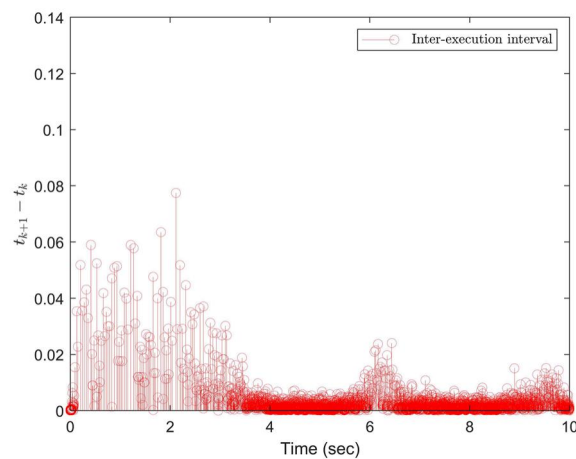


FIGURE 6 The response of inter-execution interval of Example 1 in case 2.

a second-order stochastic nonlinear system of the following form

$$\begin{cases} dx_1 = x_2 dt \\ dx_2 = (u - 5 \sin(x_1))dt + 0.5x_2 \sin(x_1)d\omega \\ y = x_1 \end{cases} \quad (78)$$

where the initial condition is  $x_1(0) = x_2(0) = 0$ .

In the simulation, the reference trajectory is selected as  $y_d = \sin(t)$ . The control structure is chosen in the same way as Theorem 1. The tracking error  $e_1$  satisfies the predefined performance constraint:  $-2.7\psi(t) < e_1(t) < 2.7\psi(t)$ , and the design parameters take the following values:  $\psi_1 = 0.8$ ,  $\psi_2 = 0.03$ ,  $T_c = 5$ ,  $\lambda = 0.01$ ,  $\rho = 0.001$ ,  $m' = 3$ ,  $k_1 = 1$ ,  $k_2 = 45$ . The simulation results of the system (78) are shown in Figures 7–11.

Figure 7 displays the responses of the system output  $y$  and the reference signal  $y_d$ , which shows that the satisfying tracking performance can be achieved. Figure 8 indicates that the tracking error  $e_1$  converges to a small residual set of zero with finite-time performance constraint. Figures 9 and 10 show the responses of  $v(t)$ ,  $u(t)$  and  $x_2$ , respectively. Figure 11 displays the response of inter-execution interval, which indicates that Zeno behavior has been avoided successfully. The simulation results further verify the feasibility of the control strategy proposed in this paper.

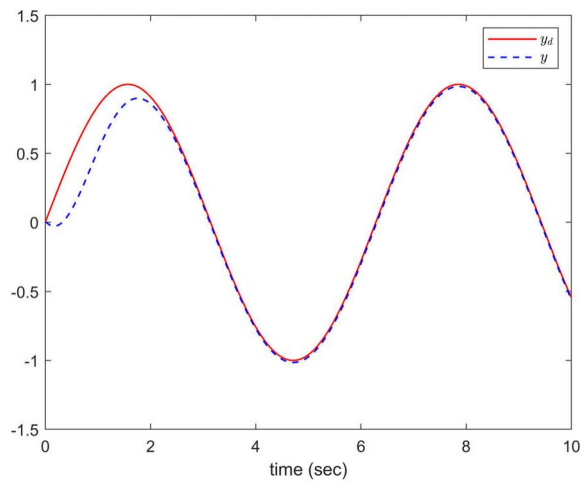


FIGURE 7 The responses of  $y_d$  and  $y$  of Example 2.

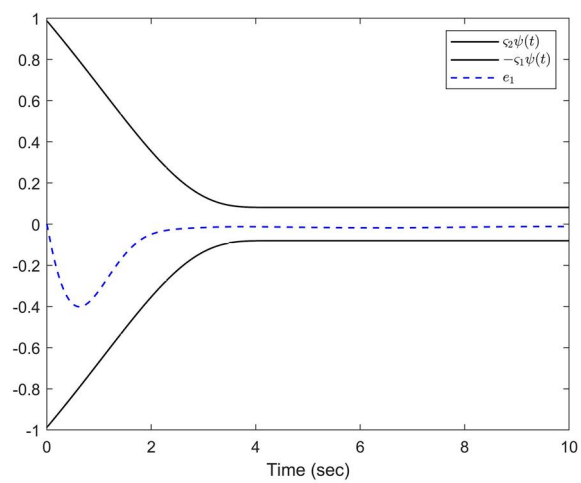


FIGURE 8 The response of  $e_1$  with performance constraint of Example 2.

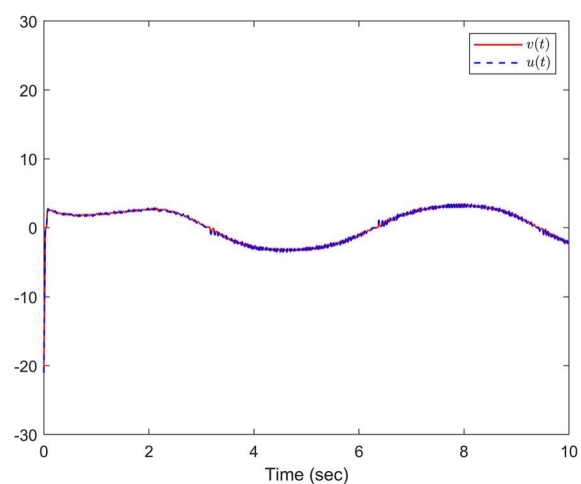


FIGURE 9 The responses of  $v(t)$  and  $u(t)$  of Example 2.

Downloaded from https://onlinelibrary.wiley.com/doi/10.1002/acs.3812. By China University Of Petroleum, Wiley Online Library on [04/03/2026]. See the Terms and Conditions (https://onlinelibrary.wiley.com/terms-and-conditions) on Wiley Online Library for rules of use; OA articles are governed by the applicable Creative Commons License

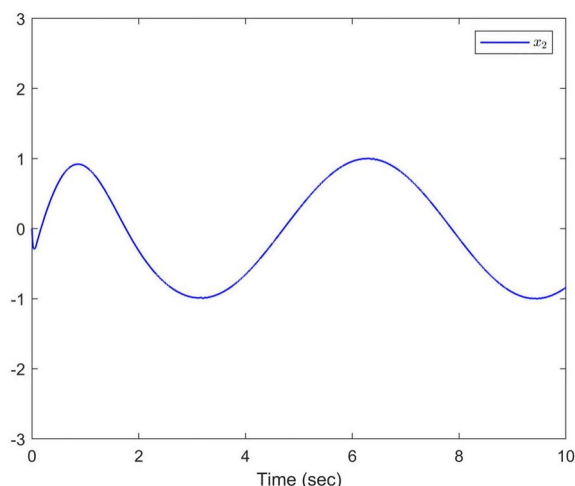


FIGURE 10 The response of state variable  $x_2$  of Example 2.



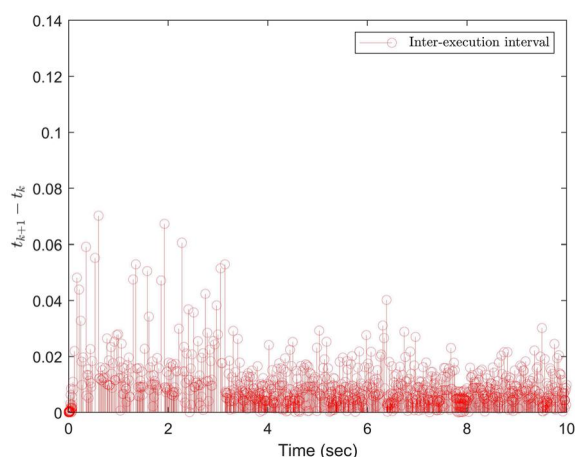


FIGURE 11 The response of inter-execution interval of Example 2.

*Remark 5.* The aforementioned stability analysis and simulations show that the control performance of system can be influenced by the design parameters chosen. The tracking performance and convergence speed can be enhanced by selecting the optimal design parameters. Therefore, in order to more successfully meet the specific control objectives, the real engineering system should be carefully adjusted to select the most appropriate parameters.

## 5 | CONCLUSION

In this paper, the problem of predetermined finite-time performance control has been investigated for strict-feedback stochastic nonlinear systems, in which an easy-to-implement FTPF has been introduced to describe the predefined tracking performance. The original constrained tracking error has been transformed into an equivalent unconstrained variable by means of a transformation function. Moreover, an event-triggered adaptive tracking control strategy has been proposed with the aid of adaptive backstepping method and MTN. Based on the above technologies, this control strategy has guaranteed that all signals of the closed-loop system were bounded in probability. It also has achieved predetermined tracking performance in a finite time and saved communication resources while avoiding Zeno behavior. Finally, simulation results have shown the effectiveness of the proposed control strategy.



## ACKNOWLEDGMENTS

The authors would like to thank Editor-in-Chief, Associate Editor, and the anonymous reviewers for their insightful comments and valuable suggestions that are helpful for revising and improving our paper.

## FUNDING INFORMATION

This work was supported by the Shandong Provincial Natural Science Foundation, China (No. ZR2020QF055).

## ORCID

Dong-Mei Wang  <https://orcid.org/0000-0002-4073-6392>



Li-Ting Lu  <https://orcid.org/0009-0000-1810-990X>

Yu-Qun Han  <https://orcid.org/0000-0002-9055-2954>



Qing-Hua Zhou  <https://orcid.org/0009-0006-2610-1549>

## REFERENCES

1. Wang HQ, Chen B, Lin C. Adaptive neural tracking control for a class of stochastic nonlinear systems. *Int J Robust Nonlinear Control*. 2014;24(7):1262-1280. doi:10.1002/rnc.2943
2. Wu J, Chen XM, Zhao QJ, Li J, Wu ZG. Adaptive neural dynamic surface control with prespecified tracking accuracy of uncertain stochastic nonstrict-feedback systems. *IEEE Trans Cybern*. 2022;52(5):3408-3421. doi:10.1109/TCYB.2020.3012607
3. Wu J, He FR, Shen H, Ding SH, Wu ZG. Adaptive NN fixed-time fault-tolerant control for uncertain stochastic system with deferred output constraint via self-triggered mechanism. *IEEE Trans Cybern*. 2023;53(9):5892-5903. doi:10.1109/TCYB.2022.3205765
4. Wu LG, Zheng WX, Gao HJ. Dissipativity-based sliding mode control of switched stochastic systems. *IEEE Trans Automat Contr*. 2013;58(3):785-791. doi:10.1109/TAC.2012.2211456
5. Wang H. Robust control of the output probability density functions for multivariable stochastic systems with guaranteed stability. *IEEE Trans Automat Contr*. 1999;44(11):2103-2107. doi:10.1109/9.802925
6. Zhou Q, Shi P, Xu SY, Li HY. Observer-based adaptive neural network control for nonlinear stochastic systems with time delay. *IEEE Trans Neural Netw Learn Syst*. 2013;24(1):71-80. doi:10.1109/TNNLS.2012.2223824
7. Li ZF, Li TS, Feng G, Zhao R, Shan QH. Neural network-based adaptive control for pure-feedback stochastic nonlinear systems with time-varying delays and dead-zone input. *IEEE Trans Syst Man Cybern Syst*. 2020;50(12):5317-5329. doi:10.1109/TSMC.2018.2872421
8. Zhao XD, Wang XY, Zong GD, Zheng XL. Adaptive neural tracking control for switched high-order stochastic nonlinear systems. *IEEE Trans Cybern*. 2017;47(10):3088-3099. doi:10.1109/TCYB.2017.2684218
9. Liu YC, Zhu QD. Adaptive neural network asymptotic tracking control for nonstrict feedback stochastic nonlinear systems. *Neural Netw*. 2021;143:283-290. doi:10.1016/j.neunet.2021.06.011
10. Li YM, Zhang JX, Tong SC. Fuzzy adaptive optimized leader-following formation control for second-order stochastic multiagent systems. *IEEE Trans Industr Inform*. 2022;18(9):6026-6037. doi:10.1109/TII.2021.3133927
11. Tong SC, Wang T, Li YM. Fuzzy adaptive actuator failure compensation control of uncertain stochastic nonlinear systems with unmodeled dynamics. *IEEE Trans Fuzzy Syst*. 2014;22(3):563-574. doi:10.1109/TFUZZ.2013.2264939
12. Yan HS, Wang GB. Adaptive tracking control for stochastic nonlinear systems with time-varying delays using multi-dimensional Taylor network. *ISA Trans*. 2023;132:246-257. doi:10.1016/j.isatra.2022.06.004
13. Wang MX, Zhu SL, Liu SM, Du Y, Han YQ. Design of adaptive finite-time fault-tolerant controller for stochastic nonlinear systems with multiple faults. *IEEE Trans Autom Sci Eng*. 2023;20(4):2492-2502. doi:10.1109/TASE.2022.3206328
14. He WJ, Zhu SL, Li N, Han YQ. Adaptive finite-time control for switched nonlinear systems subject to multiple objective constraints via multi-dimensional Taylor network approach. *ISA Trans*. 2023;136:323-333. doi:10.1016/j.isatra.2022.10.048
15. Han YQ. Adaptive tracking control for a class of stochastic nonlinear systems with input saturation constraint using multi-dimensional Taylor network. *IET Control Theory Appl*. 2020;14(9):1193-1199. doi:10.1049/iet-cta.2019.0934
16. Han YQ. Adaptive tracking control for a class of stochastic nonlinear systems with input delay: a novel approach based on multi-dimensional Taylor network. *IET Control Theory Appl*. 2020;14(15):2147-2153. doi:10.1049/iet-cta.2020.0336
17. Han YQ, Sun JJ. Adaptive finite-time control for a class of stochastic nonlinear systems with input saturation constraints: a new approach based on multidimensional Taylor network. *Int J Robust Nonlinear Control*. 2024;34(8):5329-5345. doi:10.1002/rnc.7266
18. Han YQ, Yan HS. Observer-based multi-dimensional Taylor network decentralised adaptive tracking control of large-scale stochastic nonlinear systems. *Int J Control*. 2020;93(7):1605-1618. doi:10.1080/00207179.2018.1521994
19. Åström KJ, Bernhardsson B. Comparison of periodic and event based sampling for first-order stochastic systems. *IFAC Proc Vol*. 1999;32(2):5006-5011. doi:10.1016/S1474-6670(17)56852-4
20. Jin X, Li YX, Tong SC. Adaptive event-triggered control design for nonlinear systems with full state constraints. *IEEE Trans Fuzzy Syst*. 2021;29(12):3803-3811. doi:10.1109/TFUZZ.2020.3028645
21. Huang JS, Wang W, Wen CY, Li GQ. Adaptive event-triggered control of nonlinear systems with controller and parameter estimator triggering. *IEEE Trans Automat Contr*. 2020;65(1):318-324. doi:10.1109/TAC.2019.2912517



22. Xing LT, Wen CY, Liu ZT, Su HY, Cai JP. Event-triggered adaptive control for a class of uncertain nonlinear systems. *IEEE Trans Automat Contr*. 2017;62(4):2071-2076. doi:[10.1109/TAC.2016.2594204](https://doi.org/10.1109/TAC.2016.2594204)
23. Wu LG, Gao YB, Liu JX, Li HY. Event-triggered sliding mode control of stochastic systems via output feedback. *Automatica*. 2017;82:79-92. doi:[10.1016/j.automatica.2017.04.032](https://doi.org/10.1016/j.automatica.2017.04.032)
24. Wang JH, Liu Z, Zhang Y, Chen CLP. Neural adaptive event-triggered control for nonlinear uncertain stochastic systems with unknown hysteresis. *IEEE Trans Neural Netw Learn Syst*. 2019;30(11):3300-3312. doi:[10.1109/TNNLS.2018.2890699](https://doi.org/10.1109/TNNLS.2018.2890699)
25. Wang T, Ma M, Qiu JB, Gao HJ. Event-triggered adaptive fuzzy tracking control for pure-feedback stochastic nonlinear systems with multiple constraints. *IEEE Trans Fuzzy Syst*. 2021;29(6):1496-1506. doi:[10.1109/TFUZZ.2020.2979668](https://doi.org/10.1109/TFUZZ.2020.2979668)
26. Gao YF, Sun XM, Wen CY, Wang W. Event-triggered control for stochastic nonlinear systems. *Automatica*. 2018;95:534-538. doi:[10.1016/j.automatica.2018.05.021](https://doi.org/10.1016/j.automatica.2018.05.021)
27. Wang LJ, Chen CLP. Reduced-order observer-based dynamic event-triggered adaptive NN control for stochastic nonlinear systems subject to unknown input saturation. *IEEE Trans Neural Netw Learn Syst*. 2021;32(4):1678-1690. doi:[10.1109/TNNLS.2020.2986281](https://doi.org/10.1109/TNNLS.2020.2986281)
28. Yu ZJ, Zhang WH. Almost sure consensus of stochastic nonlinear multi-agent systems via event-triggered control. *Nonlinear Dyn*. 2023;111(4):3469-3478. doi:[10.1007/s11071-022-07999-y](https://doi.org/10.1007/s11071-022-07999-y)
29. Zhang TL, Su SF, Wei W, Yeh RH. Practically predefined-time adaptive fuzzy tracking control for nonlinear stochastic systems. *IEEE Trans Cybern*. 2023;53(12):8000-8012. doi:[10.1109/TCYB.2023.3272581](https://doi.org/10.1109/TCYB.2023.3272581)
30. Zhang TL, Bai R, Li YM. Practically predefined-time adaptive fuzzy quantized control for nonlinear stochastic systems with actuator dead zone. *IEEE Trans Fuzzy Syst*. 2023;31(4):1240-1253. doi:[10.1109/TFUZZ.2022.3197970](https://doi.org/10.1109/TFUZZ.2022.3197970)
31. Zheng Y, Gao SG, Zheng W, Dong HR. Fuzzy adaptive event-triggered control for uncertain nonlinear system with prescribed performance: a combinational measurement approach. *J Franklin Inst*. 2022;359(1):371-391. doi:[10.1016/j.jfranklin.2021.09.033](https://doi.org/10.1016/j.jfranklin.2021.09.033)
32. Hu XY, Li YX, Hou ZS, Niu B. Event-triggered prescribed performance adaptive fuzzy asymptotic tracking of nonstrict-feedback nonlinear systems. *Int J Robust Nonlinear Control*. 2021;31(12):5776-5795. doi:[10.1002/rnc.5569](https://doi.org/10.1002/rnc.5569)
33. Sui S, Tong SC, Li YM. Observer-based fuzzy adaptive prescribed performance tracking control for nonlinear stochastic systems with input saturation. *Neurocomputing*. 2015;158:100-108. doi:[10.1016/j.neucom.2015.01.063](https://doi.org/10.1016/j.neucom.2015.01.063)
34. Zhou Q, Li HY, Wang LJ, Lu RQ. Prescribed performance observer-based adaptive fuzzy control for nonstrict-feedback stochastic nonlinear systems. *IEEE Trans Syst Man Cybern Syst*. 2018;48(10):1747-1758. doi:[10.1109/TSMC.2017.2738155](https://doi.org/10.1109/TSMC.2017.2738155)
35. Si WJ, Dong XD, Yang FF. Adaptive neural prescribed performance control for a class of strict-feedback stochastic nonlinear systems with hysteresis input. *Neurocomputing*. 2017;251:35-44. doi:[10.1016/j.neucom.2017.04.017](https://doi.org/10.1016/j.neucom.2017.04.017)
36. Liu YL, Ma HJ. Adaptive fuzzy tracking control of nonlinear switched stochastic systems with prescribed performance and unknown control directions. *IEEE Trans Syst Man Cybern Syst*. 2020;50(2):590-599. doi:[10.1109/TSMC.2017.2764685](https://doi.org/10.1109/TSMC.2017.2764685)
37. Zhou B, Yang L, Wang CD, Lai GY, Chen Y. Adaptive finite-time tracking control of robot manipulators with multiple uncertainties based on a low-cost neural approximator. *J Franklin Inst*. 2022;359(10):4938-4958. doi:[10.1016/j.jfranklin.2022.04.025](https://doi.org/10.1016/j.jfranklin.2022.04.025)
38. Dai SL, Lu K, Fu J. Adaptive finite-time tracking control of nonholonomic multirobot formation systems with limited field-of-view sensors. *IEEE Trans Cybern*. 2022;52(10):10695-10708. doi:[10.1109/TCYB.2021.3063481](https://doi.org/10.1109/TCYB.2021.3063481)
39. Du HB, Li SH, Qian CJ. Finite-time attitude tracking control of spacecraft with application to attitude synchronization. *IEEE Trans Automat Contr*. 2011;56(11):2711-2717. doi:[10.1109/TAC.2011.2159419](https://doi.org/10.1109/TAC.2011.2159419)
40. Zhou JK, Hu QL, Friswell MI. Decentralized finite time attitude synchronization control of satellite formation flying. *J Guid Control Dynam*. 2012;36(1):185-195. doi:[10.2514/1.56740](https://doi.org/10.2514/1.56740)
41. Yu ZJ, Zhang WH, Ma LM. Finite-time consensus for the second-order leader-following nonlinear multi-agent system with event-triggered communication. *J Franklin Inst*. 2022;359(12):6486-6502. doi:[10.1016/j.jfranklin.2022.06.040](https://doi.org/10.1016/j.jfranklin.2022.06.040)
42. Wang M, Wang LX. Finite-time performance guaranteed event-triggered adaptive control for nonlinear systems with unknown control direction. *J Franklin Inst*. 2022;359(6):2463-2486. doi:[10.1016/j.jfranklin.2022.02.003](https://doi.org/10.1016/j.jfranklin.2022.02.003)
43. Yao YG, Tan JQ, Wu J. Event-triggered finite-time adaptive fuzzy tracking control for stochastic nontriangular structure nonlinear systems. *Int J Fuzzy Syst*. 2021;23:2157-2169. doi:[10.1007/s40815-021-01085-y](https://doi.org/10.1007/s40815-021-01085-y)
44. Liu Y, Liu XP, Jing YW. Adaptive neural networks finite-time tracking control for non-strict feedback systems via prescribed performance. *Inform Sci*. 2018;468:29-46. doi:[10.1016/j.ins.2018.08.029](https://doi.org/10.1016/j.ins.2018.08.029)
45. Cao Y, Song YD. Performance guaranteed consensus tracking control of nonlinear multiagent systems: a finite-time function-based approach. *IEEE Trans Neural Netw Learn Syst*. 2021;32(4):1536-1546. doi:[10.1109/TNNLS.2020.2984944](https://doi.org/10.1109/TNNLS.2020.2984944)
46. Wu J, Wang W, Ding SH, Xie XP, Yi Y. Adaptive neural optimized control for uncertain strict-feedback systems with unknown control directions and pre-set performance. *Commun Nonlinear Sci Numer Simul*. 2023;126:107506. doi:[10.1016/j.cnsns.2023.107506](https://doi.org/10.1016/j.cnsns.2023.107506)
47. Han YQ, Yan HS. Adaptive multi-dimensional Taylor network tracking control for SISO uncertain stochastic nonlinear systems. *IET Control Theory Appl*. 2018;12(8):1107-1115. doi:[10.1049/iet-cta.2017.0538](https://doi.org/10.1049/iet-cta.2017.0538)
48. He WJ, Zhu SL, Lu LT, Han YQ. A novel network-based adaptive fault-tolerant control of switched nonlinear systems subject to multiple faults under prescribed performance. *ISA Trans*. 2024;145:78-86. doi:[10.1016/j.isatra.2023.12.008](https://doi.org/10.1016/j.isatra.2023.12.008)
49. He WJ, Zhu SL, Lu LT, Zhao W, Han YQ. Adaptive multi-switching-based global tracking control for switched nonlinear systems with prescribed performance. *IEEE Trans Autom Sci Eng*. 2023. doi:[10.1109/TASE.2023.3277470](https://doi.org/10.1109/TASE.2023.3277470)
50. Han YQ, He WJ, Li N, Zhu SL. Tracking control for large-scale switched nonlinear systems subject to asymmetric input saturation and output hysteresis: a new adaptive network-based approach. *Int J Robust Nonlinear Control*. 2022;32(14):8052-8072. doi:[10.1002/rnc.6258](https://doi.org/10.1002/rnc.6258)



51. Li YK, Sun HB, Zong GD, Hou LL. Disturbance-observer-based-control and  $L_2 - L_\infty$  resilient control for Markovian jump non-linear systems with multiple disturbances and its application to single robot arm system. *IET Control Theory Appl.* 2016;10(2):226-233. doi:10.1049/iet-cta.2015.0430

**How to cite this article:** Wang D-M, Zhu S-L, Lu L-T, Han Y-Q, Wang W, Zhou Q-H. Event-triggered adaptive tracking control for stochastic nonlinear systems under predetermined finite-time performance. *Int J Adapt Control Signal Process.* 2024;38(7):2465-2484. doi: 10.1002/acs.3812